

# NOVO

## SPOT LIGHT

P-SSPL-9




### PRODUCT DESCRIPTION


Introducing “Novo” – your versatile lighting solution. With adjustable design and an isolated driver for optimal performance, “Novo” ensures exceptional reliability. Featuring IP65 protection and sleek white finish, its durable aluminium housing guarantees longevity. “Novo” is the perfect choice for any space. Experience simplicity and sophistication with “Novo” spotlight.

 **LIFE HOURS : 50000H**


### PRODUCT DIMENSION

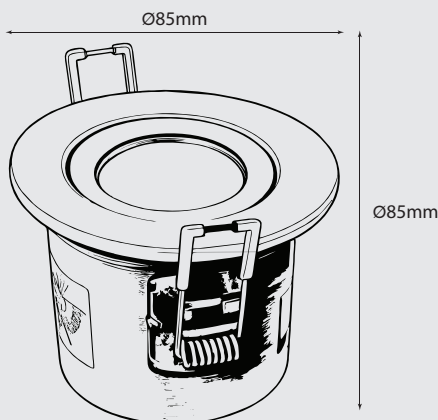


### BASIC DETAILS

-  **Wattage**  
5W | 7W | 9W (Switchable)


---

-  **Input Voltage:**  
220–240V AC


---

-  **Output Voltage Range**  
60–120V DC


---

-  **Freequency**  
50/60Hz


---

-  **Power Factor**  
>0.9


---

-  **Dimming Mode:**  
**Dimmable**


---

-  **Flicker**  
**No**


---

-  **Light Source**  
**LED**


---

-  **Luminous Flux (± 5% tolerance)**  
**520Lm | 700Lm | 850 Lm**


---

-  **Colour Temperature**  
**2700K | 3000K | 4000K | 6500K**

---

-  **CRI**  
**>80**

---

-  **Luminous Efficiency**  
**110 lm/W (± 5%)**



Beam Angle  
60°



Body Finish  
White



Environment  
Indoor



Material  
Aluminium + Iron



Mounting  
Concealed



IK Rating  
IK 07



Operating Temp  
-20°C to +35°C



Outer Dia  
Dia 85 × 85mm



IP Rating  
IP 65



Size Cutout  
74mm

## APPLICATION AREA

Office | Supermarket | Shop | School | Hotel | Stairway | Lobby | Reception | Corridors

