



# FLAME SURFACE LIGHT

PSL-15F-CN

## Product Description

Introducing the Flame series Surface Light: Fusion of form and function with a resilient die-cast aluminum body and integrated driver for seamless design. Illuminate dynamically with a 330-degree rotatable light for versatile coverage. Timeless elegance in white or sleek black, fitting any setting perfectly


### Application Area

living rooms, bedrooms, kitchens, bathrooms, offices, hallways, retail stores, restaurants, and other indoor spaces.

## Certifications

- CE
- RoHS

## Light Distribution Diagram

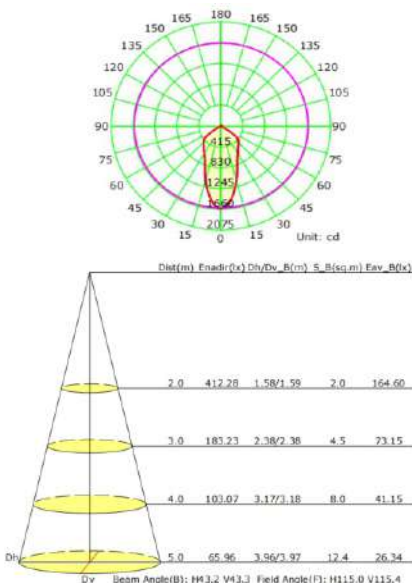

## Basic Details

|                       |                |
|-----------------------|----------------|
| WATTAGE               | 15W            |
| COLOUR TEMPERATURE    | 3000K          |
| LUMAN/WATT            | 128.46lm/W     |
| INPUT VOLTAGE         | AC220-240V     |
| FREQUENCY             | 50/60Hz        |
| POWER FACTOR          | 0.5            |
| IP RATING             | Ip20           |
| OPERATING TEMPERATURE | -20°C TO +40°C |
| DIMMABLE              | NO             |
| CRI                   | >80            |
| MATERIAL              | ALUMINIUM      |
| BODY FINISH           | WHITE/BLACK    |
| LAMP TYPE             | COB            |
| LIFE HOURS            | 30000HRS       |
| LED CHIP              | EDISON         |
| BEAM ANGLE            | 40*            |
| IK RATING             | Ik06           |
| MOUNTING              | SURFACE        |

|                       |              |
|-----------------------|--------------|
| Available Wattage (W) | 15W          |
| Dimmension            | Dia 100x95mm |

## Mounting Information

