

GLEAM | STREET LIGHT

PST100-AD, PST200-AD




PRODUCT DESCRIPTION

Introducing Glead: a robust street light prioritizing durability and efficiency. Its die-cast aluminum housing ensures sturdiness and heat dissipation. With a dedicated drive box for tool-less maintenance and IP66-rated protection, Glead offers reliability against environmental elements. Its adjustable pole mounting bracket enhances versatility for various installations.

 LIFE HOURS : 50000HRS

PRODUCT DIMENSION

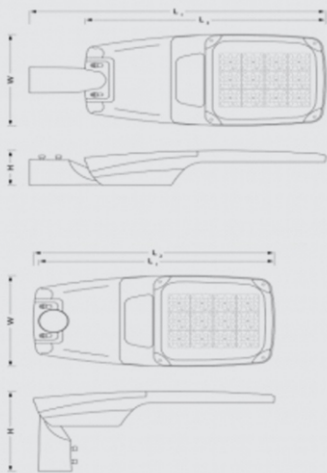

CERTIFICATIONS



BASIC DETAILS



Wattage
80W,150W



Colour Temperature
4000K



Lumen Flux/Watt
150 lm/W



Luminous Flux
12000/22500Lm



Voltage
100–227V AC



Freequency
50/60Hz



Driver Included
Yes



High Surge Protection
10kv Upto 20kv



LED Type
3030/5050



Working Temperature
–40°C to +50°C



Protection Class IEC
1



Dimming
PWM 0–10V DALI(PR)

BASIC DETAILS

	CRI >70/ >80		Beam Angle 30° X 130°
	Material Aluminium Pressure Die Cast		IP Rating IP 66
	Cover High Transparent Flat Glass		IK Rating IK08
	External Screw SS		Mounting Specially designed pole mounting bracket with adjustable tilt angles of 0 to 15 degrees, which can also be used in post top & lateral mounting positions.
	Finishing Color Black		
	Power Factor ≥0.95		

Product Code	PST100-AD
Available Wattage	80W
Size Cutout	710X280X110mm

Product Code	PST200-AD
Available Wattage	150W
Size Cutout	780X320X110mm

APPLICATION AREA

CYCLE PATHS | URBAN & RESIDENTIAL AREA | FOOTPATHS & PEDESTRIAN CROSSING | TRAFFIC ROUTES & MAIN ACCESS ROAD | CITY CENTERS & MAIN STREETS.

